


REMOVAL

1. DISCONNECT CABLE FROM NEGATIVE BATTERY TERMINAL
2. REMOVE V-BANK COVER (See page [ES-414](#))
3. REMOVE MASS AIR FLOW METER
 - (a) Disconnect the connector.
 - (b) Remove the 2 screws, then remove the mass air flow meter.

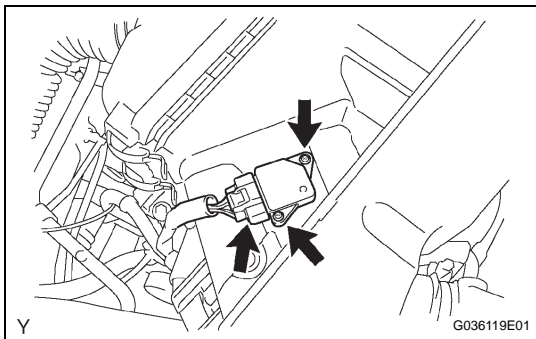

INSTALLATION

1. INSTALL MASS AIR FLOW METER
2. INSTALL V-BANK COVER (See page [ES-416](#))
3. CONNECT CABLE TO NEGATIVE BATTERY TERMINAL
Torque: 3.9 N*m (40 kgf*cm, 35 in.*lbf)